


产品介绍 (一) Product Introduction (1)



Product category	Axis class
Processing material	40Cr, 42CrMo, 20CrMnTi, SUJ2, SUS420J, 45#
Tolerance	Coaxiality 0.002mm, cylindricity 0.002mm

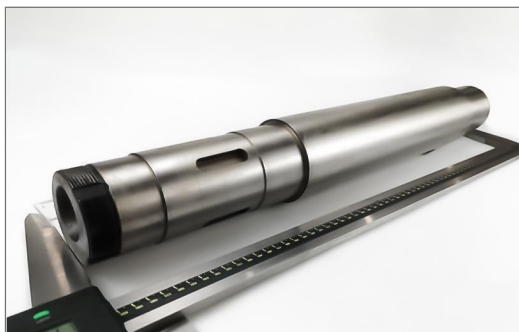

Product category	Valves
Processing material	40Cr, 42CrMo, 20CrMnTi, SUJ2, SUS420J, 45#
Tolerance	Fit 0.002mm, cylindricity 0.002mm



Product category	Nested class
Processing material	40Cr, 42CrMo, 20CrMnTi, SUJ2, SUS420J, 4J36, titanium alloy Tc4
Tolerance	Coaxiality 0.002mm, verticality 0.002mm



Product category	Connection piece
Processing material	40Cr, 42CrMo, 20CrMnTi, SUJ2, SUS420J, 45#
Tolerance	Coaxiality 0.002mm, verticality 0.005mm



Product category	Inspection tools, tools, fixtures
Processing material	S136, 42CrMo, 20CrMnTi, SUJ2, SUS420J
Tolerance	Dimensional tolerance 0.01mm



Product category	Mold accessories
Processing material	SP60, SP23, SKH59, SKH51, SKD11, Cr12MoV
Tolerance	Diameter tolerance 0.001mm, cylindricity 0.002mm

产品介绍 (二) Product Introduction (2)



Product category	Automated parts
Processing material	40Cr, 42CrMo, 20CrMnTi, SUJ2, SUS420J, SUS316, L6061, 45#
Tolerance	Diameter tolerance 0.001mm, cylindricity 0.002mm



Product category	Semiconductor, optical and electronic components
Processing material	Tungsten steel, hard alloy, ceramic
Tolerance	Coaxial/roundness 0.002mm, diameter tolerance 0.001mm



Product category	Aerospace and military components
Processing material	Tungsten steel, hard alloy, ceramic, zirconia, Alumina
Tolerance	Coaxial/roundness 0.002mm, diameter tolerance 0.001mm




Product category	Medical components
Processing material	Titanium alloy, high-temperature alloy, ceramic, SUS420J, SUS316
Tolerance	Diameter tolerance 0.001mm, cylindricity 0.002mm




Product category	Ceramic components
Processing material	Aluminum oxide, zirconia
Tolerance	Coaxial/roundness 0.002mm, diameter tolerance 0.001mm




Product category	Tungsten steel components
Processing material	Tungsten steel, hard alloy
Tolerance	Coaxial/roundness 0.003mm, smoothness Ra0.2



Aperture accuracy
0.002mm




Hole depth
accuracy 0.05mm



Minimum slot
width 0.02mm



Roughness Ra0.2



Cylindricity 0.002mm




Concentricity
0.002mm




Perpendicularity
0.003mm



Parallelism
0.005mm



Full runout 0.002mm



Symmetry 0.003mm



Internal thread M2



Flatness 0.003mm

磨削部成品展示

Display of finished products in the grinding department



CNC universal grinding parts



CNC end face grinding parts



Punch grinding machined parts



Centerless grinding parts




Cylindrical grinding parts



Machined parts of large water mill and surface mill

线割部成品展示 Display of finished products in the wire cutting department

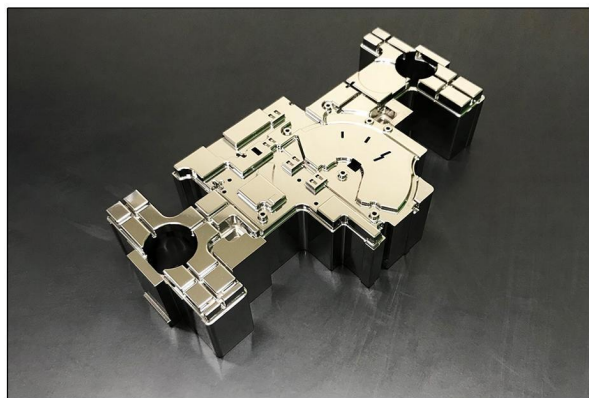

Insert



Pallet version




Parts



Snap ring



Terminals, inserts

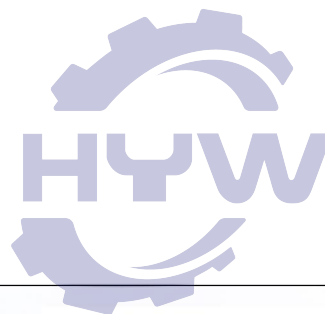


放电部成品展示 Display of finished discharge parts




Striker, nozzle




Mold inserts

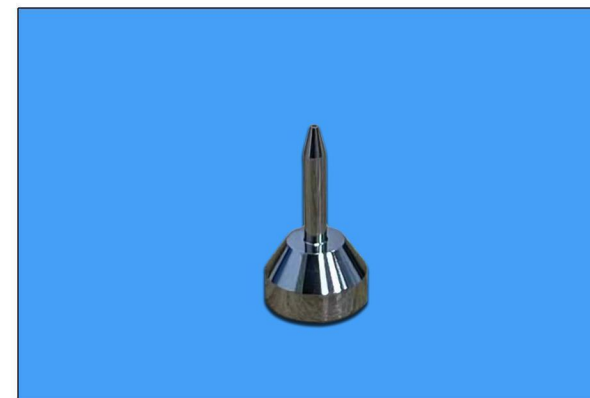


Injector

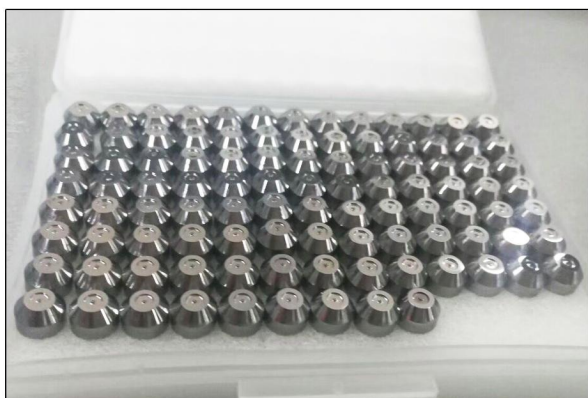

Dispensing machine nozzle

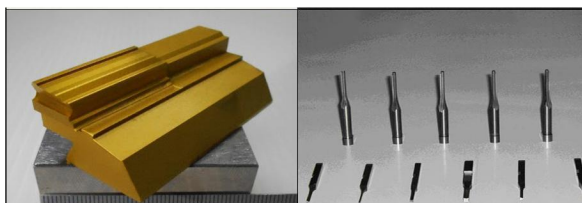

Mold inserts

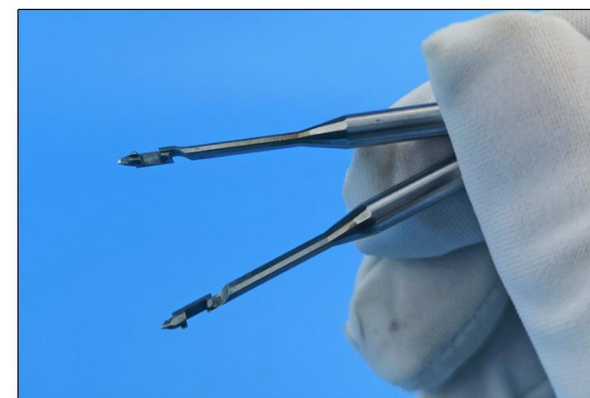


Positive and negative crochet needles

抛光部成品展示 Polishing department finished product display



Tungsten steel sleeve

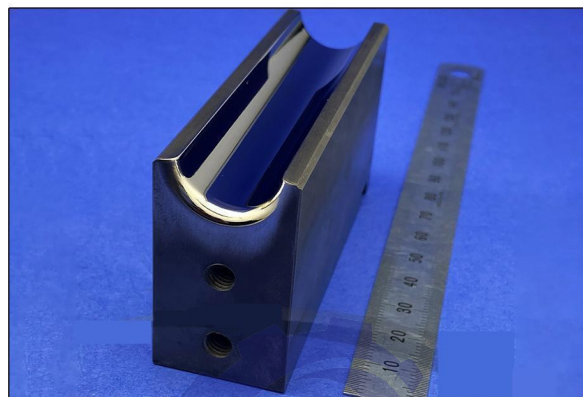

Insert



Tungsten steel spherical polishing



Tungsten steel parts



Tungsten steel inserts



Male mold, female mold